



MODEL NO.

5.5" FHD CAMERA-TOP MONITOR

Specific Monitor by LILLIPUT with Broadcast Quality for Full HD Camcorder & DSLR Application for CCTV Monitoring & Making Movies.



Excellent Display

It features 5.5" 16:9 IPS panel with 1920x1080 full HD resolution (401ppi), 1000:1 high contrast, 160° wide viewing angles, 450cd/m² high brightness, which offers outstanding viewing experience.



Durable Protection

Metal housing with silicon rubber case, which provides a perfect protection from shock and drop. It's also convenient for applications in complex outdoor environment when accompanying with sun shade.




Cross Conversion

The HDMI output connector can actively transmit an HDMI input signal or output an HDMI signal that has been converted from an SDI signal. In short, signal transmits from SDI input to HDMI output and from HDMI input to SDI output.



Advanced Functions

Lilliput creatively integrated column (YRGB peak), time code, waveform, vector scope & audio level meter into field monitor. These assist users to accurately monitor when shooting, making and playing movies/videos.

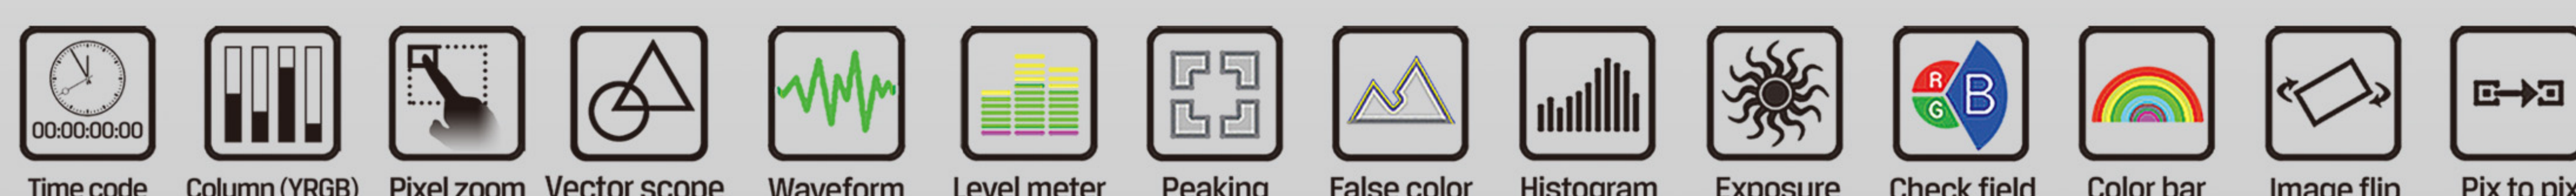

Power

Earphone

Silicon rubber case

SDI in



SDI out

HDMI out

HDMI in

Slim & Portable Design

Slim and light weight design with hot shoe mounts, which are available for a 5.5 inch monitor fixed on the top of DSLR camera and camcorder.

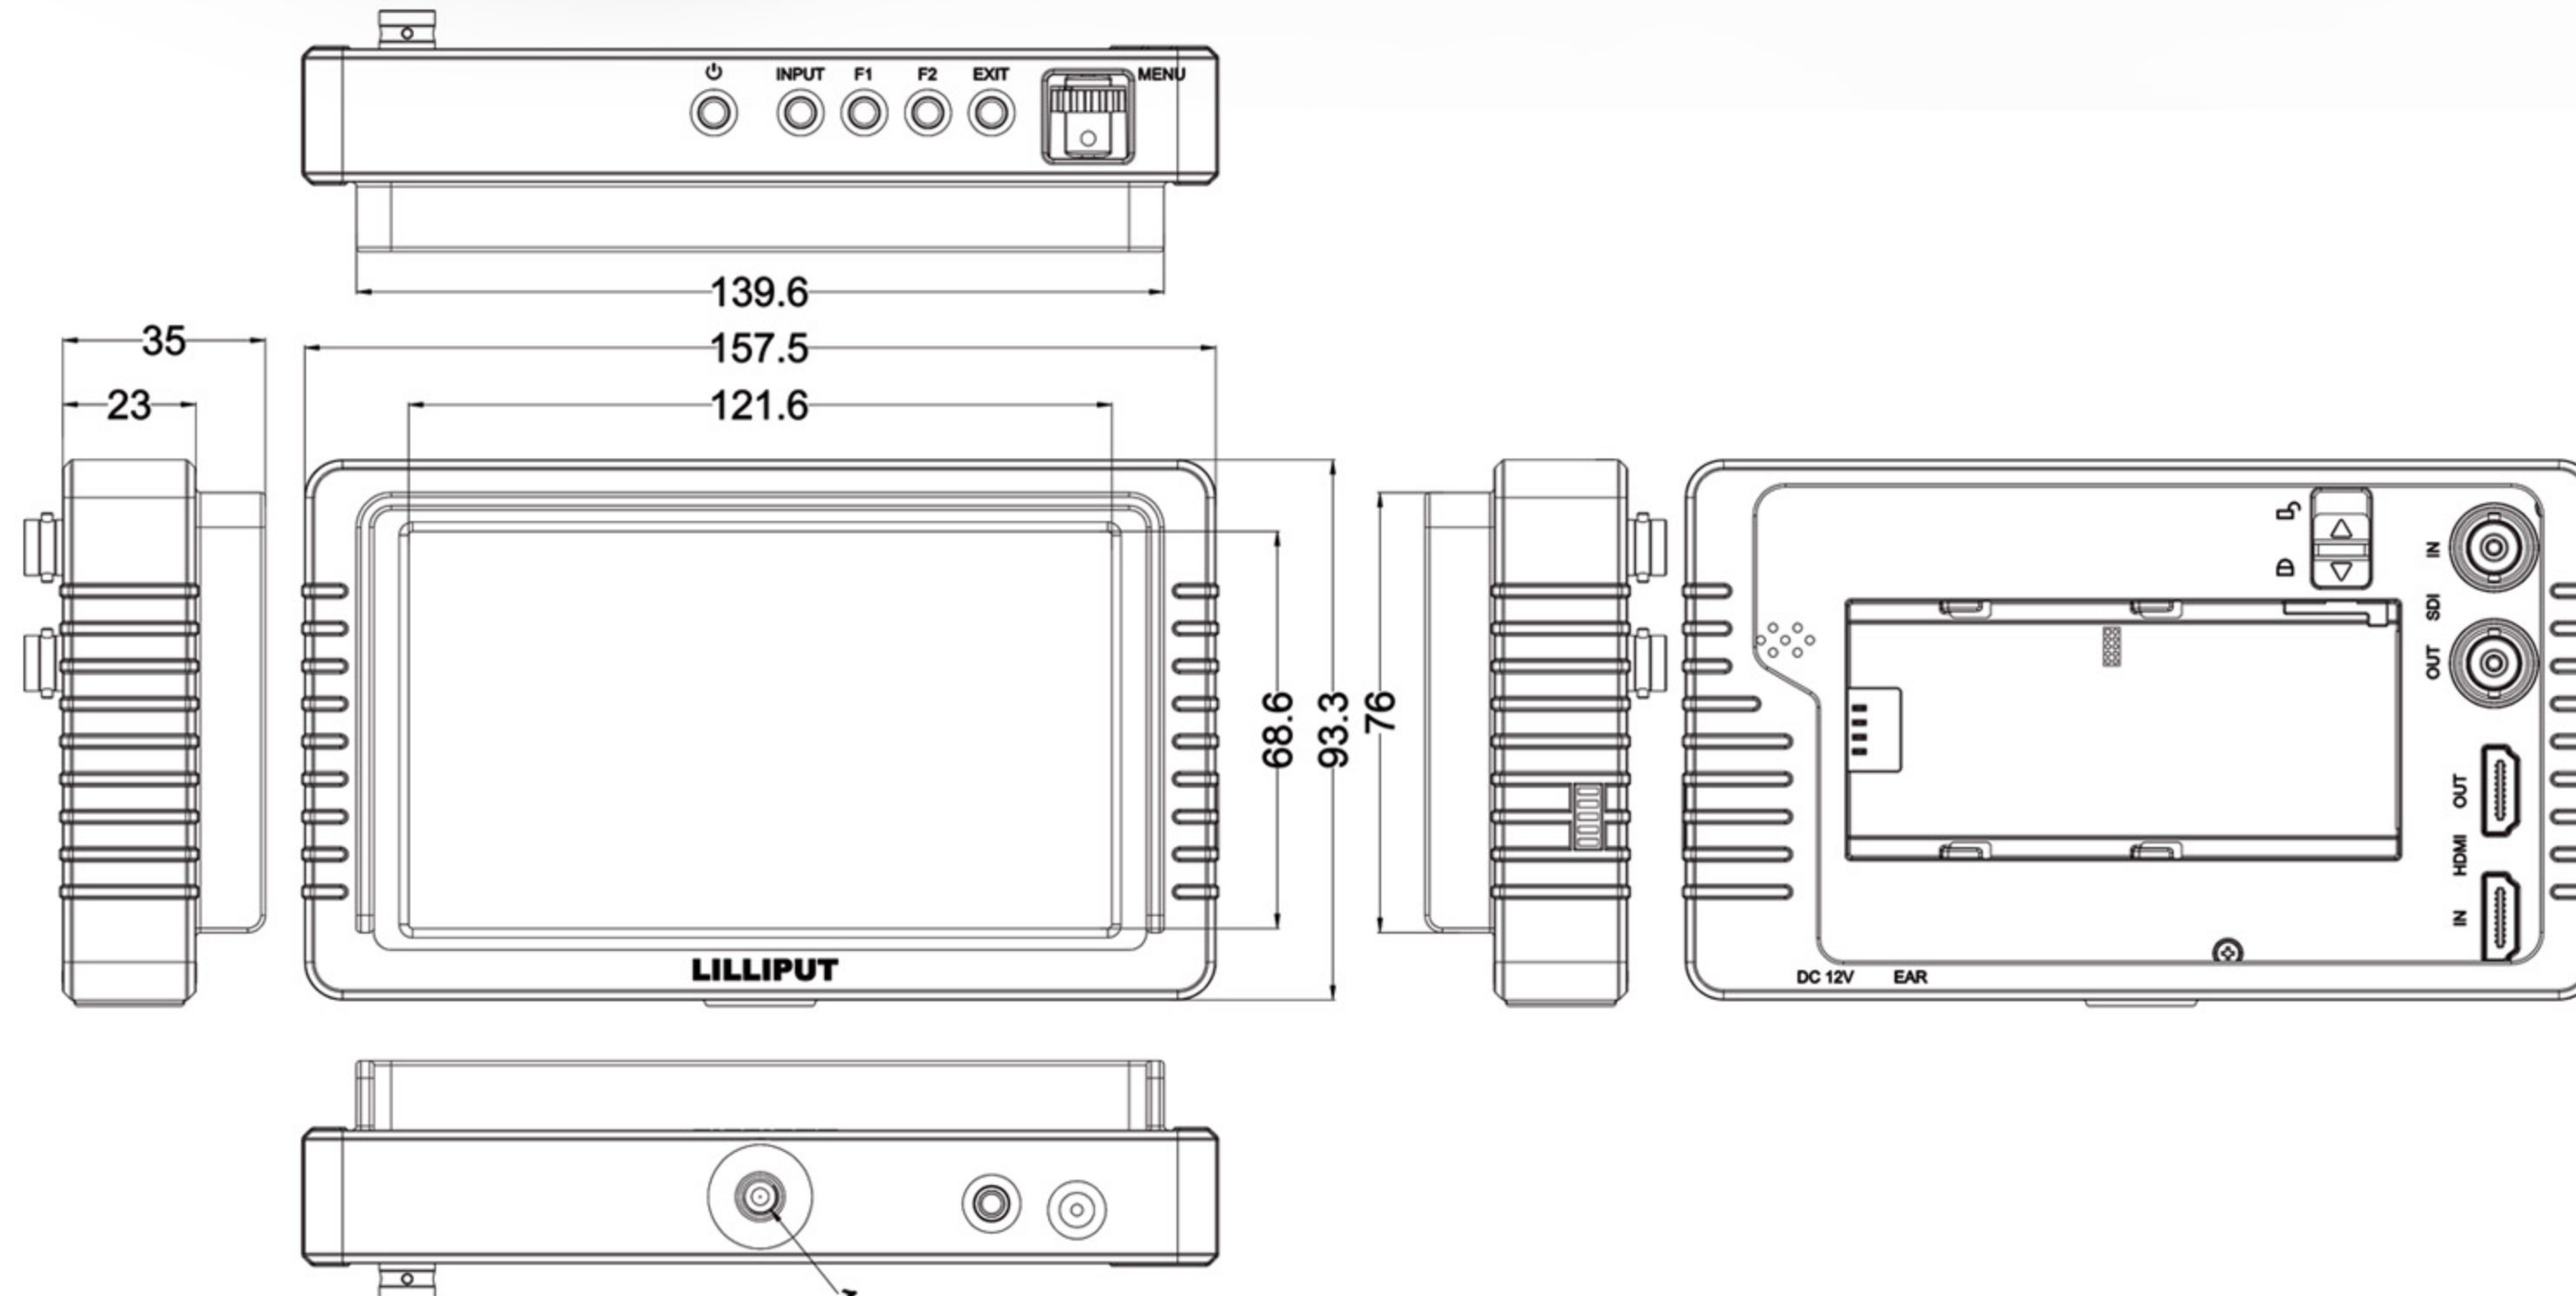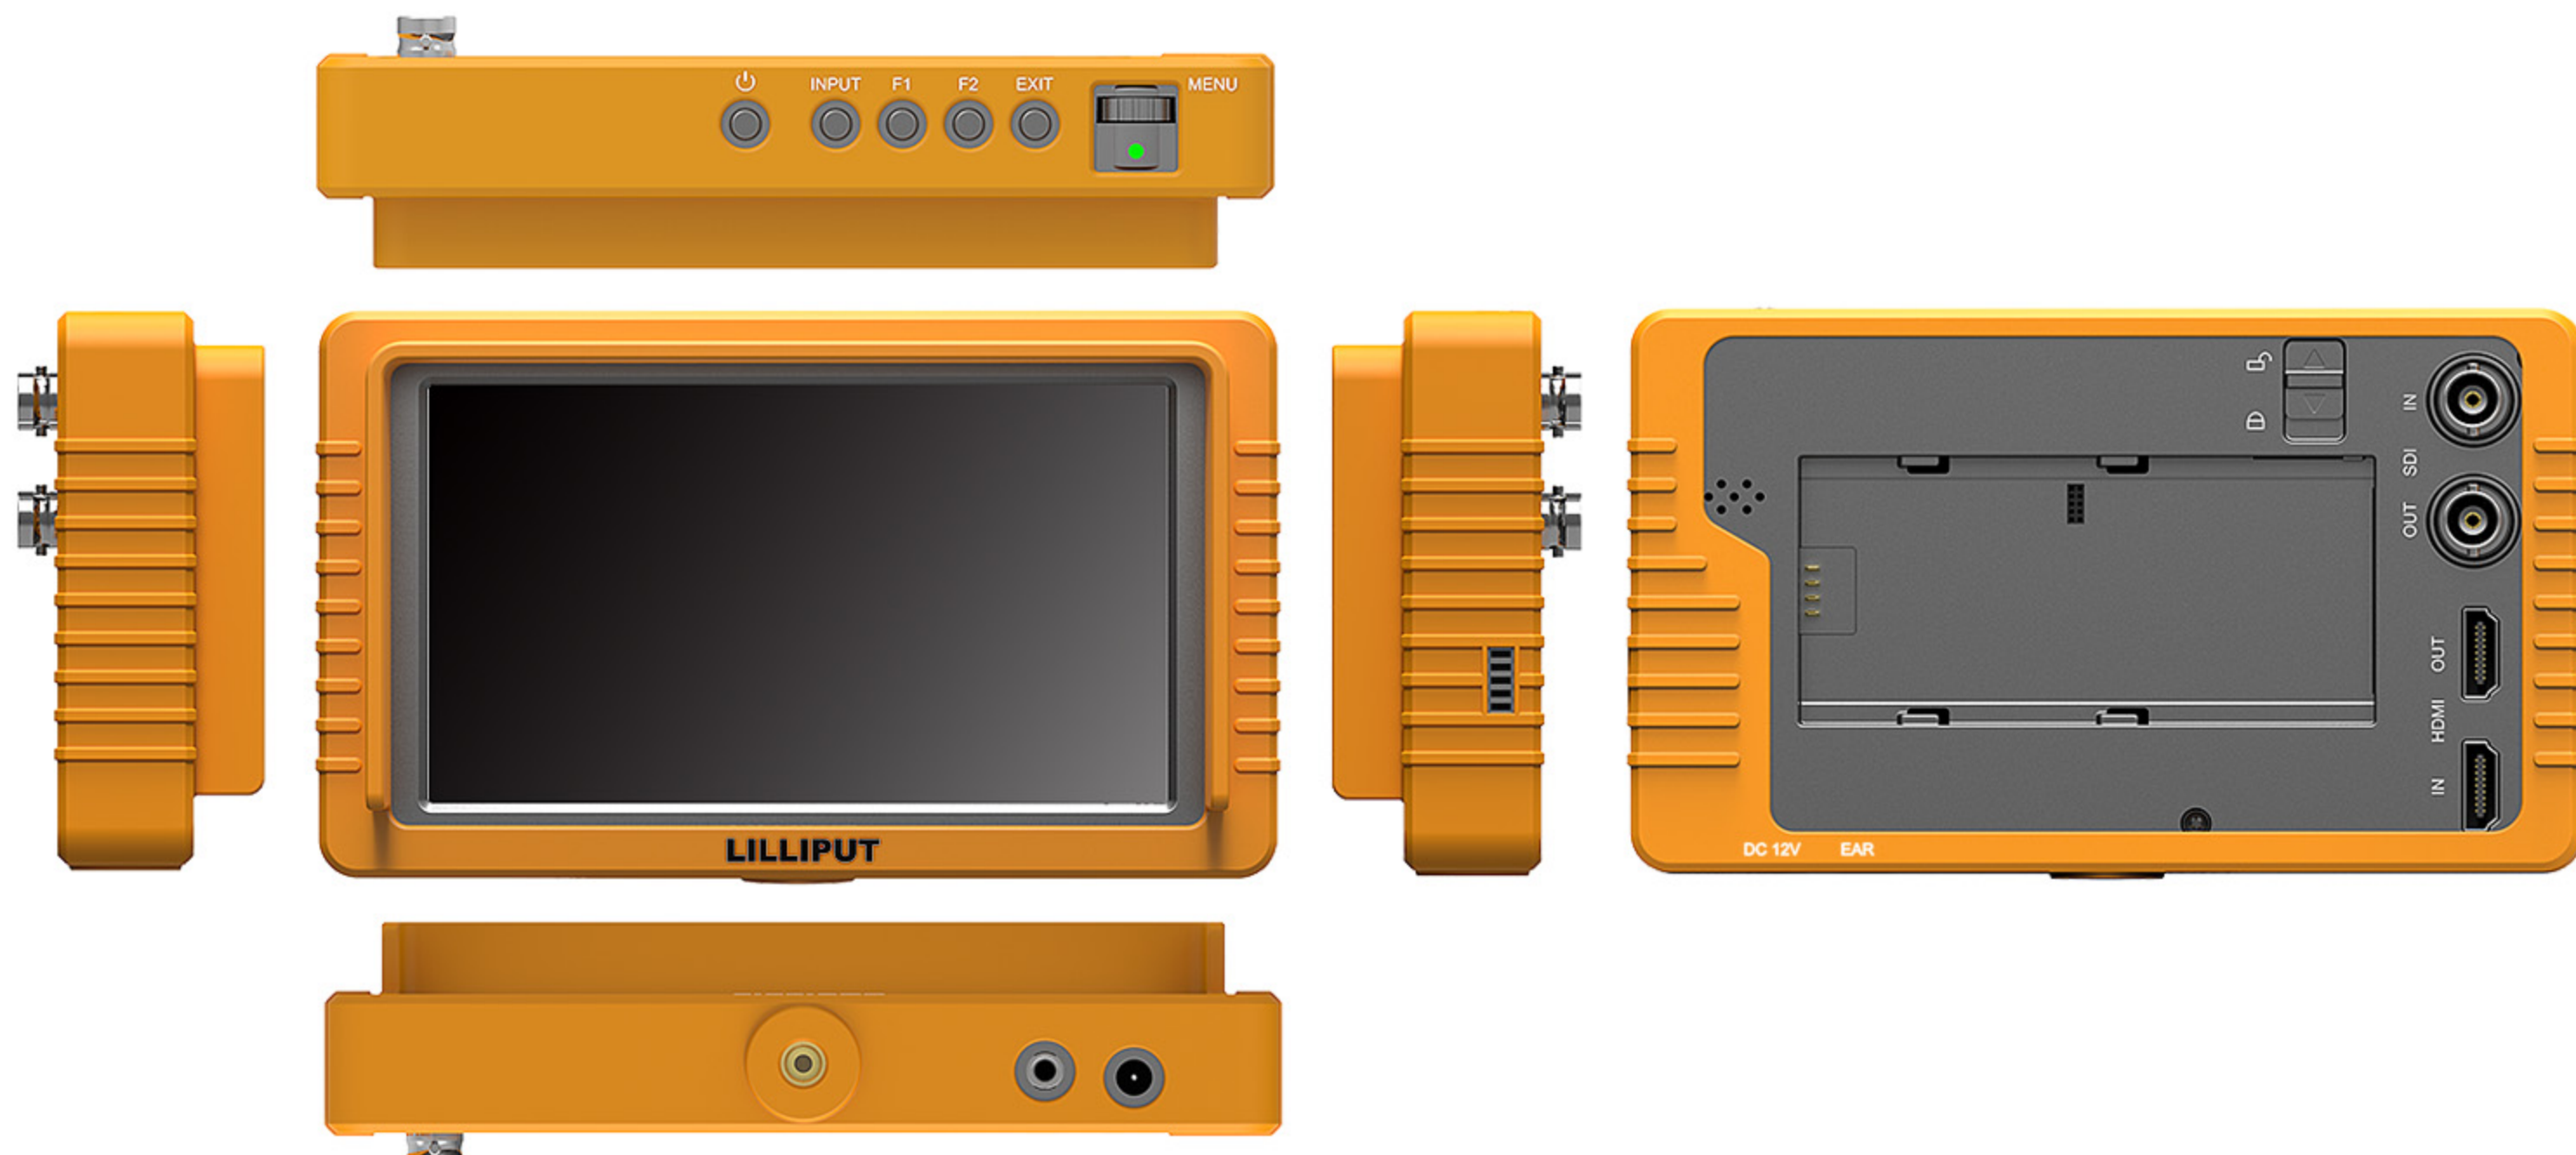

SPECIFICATIONS | ACCESSORIES

DISPLAY	Panel	5.5" IPS	SDI Format	SMPTE-125M	480i(59.94)	ACCESSORIES	1. Silicon rubber case	1 piece
	Physical Resolution	1920×1080 (401ppi)		1080i(60/59.94/50)	2. Folding sun shade cover		1 piece	
	Aspect Ratio	16:9		SMPTE-274M	1080p(30/29.97/25/24/24sF/23.98/23.98sF)		3. 12V DC adapter	1 piece
	Brightness	450cd/m²		SMPTE-292M	1080p(30/29.97/25/24/24sF/23.98/23.98sF)		4. HDMI A/C cable	1 piece
	Contrast	1000:1		SMPTE-296M	720p(60/59.94/50/30/29/25/24/23.98)		5. Shoe mount	1 piece
INPUT	Viewing Angle	160°/ 160° (H/V)	HDMI Format	1080i(29.97/25/24/23.98)	6. Battery plate (F-970, QM91D, DU21 or LP-E6)	2 pieces		
	3G-SDI	1		1080p(60/59.94/50/30/29.97/25/24/23.98)		7. Manual	1 copy	
OUTPUT	3G-SDI	1	HDMI Format	-Level A & Level B	8. Battery (optional)	1 piece		
	HDMI	1		1080p(60/59.94/50)		1 piece		
AUDIO	HDMI	1	HDMI Format	-Level B 2x	8. Battery (optional)	1 piece		
	Speaker	1		1080i(60/59.94/50)		1 piece		
POWER	Ear Phone Slot	1	HDMI Format	ITU-R BT 656	8. Battery (optional)	1 piece		
	Current	1A		1080p, 1080i, 720p, 576p, 576i, 480p, 486i		1 piece		
ENVIRONMENT	Input Voltage	DC 7-24V	HDMI Format	1080p, 1080i, 720p, 576p, 576i, 480p, 486i	8. Battery (optional)	1 piece		
	Battery Plate	F-970 / QM91D / DU21 / LP-E6		1080i(29.97/25/24/23.98)		1 piece		
DIMENSION	Power Consumption	12W	HDMI Format	1080p(60/59.94/50)	8. Battery (optional)	1 piece		
	Operating Temperature	-20℃~60℃		-Level A & Level B		2 pieces		
DIMENSION	Storage Temperature	-30℃~70℃	HDMI Format	1080i(60/59.94/50)	8. Battery (optional)	1 piece		
	Dimension(LWD)	154.5×90×20mm / 157.5×93×23mm (with case)		ITU-R BT 656		576i(50)	1 piece	
DIMENSION	Weight	320g / 340g (with case)	HDMI Format	1080p, 1080i, 720p, 576p, 576i, 480p, 486i	8. Battery (optional)	1 piece		

Note: Due to constant effort to improve products and product features, specifications may change without notice.

